




NOTE: ABOVE IMAGE OF MOTOR ONLY  
MOTOR INTEGRAL PART OF DRIVE UNIT ASSEMBLY

SPECIFICATIONS:

GEARMOTOR ASSEMBLY, AC MOTOR DRIVEN  
CONTINUOUS DUTY, TEFC  
RATED SPEED: 1450 RPM (BASE SPEED)  
POWER: 0.34 kW (0.29 HP)  
VOLTAGE: 400-480 VAC (3 PH.), 50/60HZ  
POLES: 4  
BRAKE MOTOR: YES (SEPARATELY CONTROLLED)  
MOTOR STARTING METHOD: INVERTER, DIRECT ON LINE

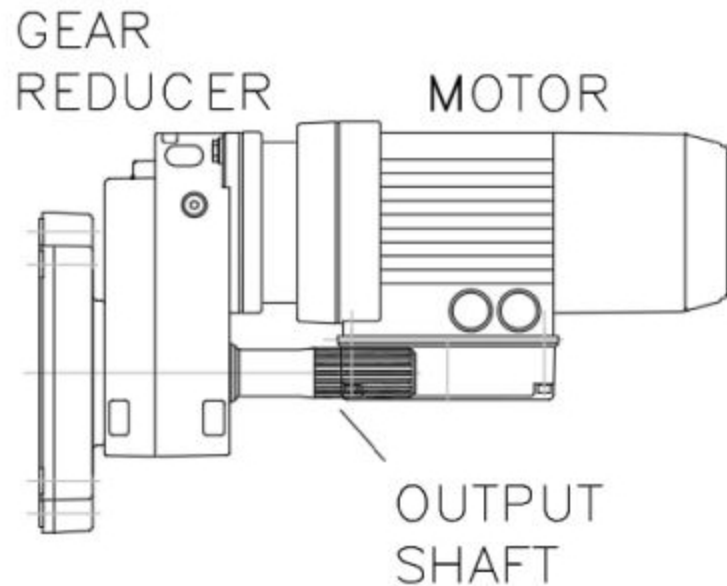

INSTALLATION / SPECIAL NOTES:

TYPICAL USE:  
OILER ONLINE/OFFLINE TRAVEL DRIVE

!! CONSULT W/GFG PRIOR TO USING WITH FULL VOLTAGE REVERSING STARTER CONTROLLED APPLICATIONS

REV	DESCRIPTION	DATE	APPROVED
-	-	-	-
-	-	-	-



REVISIONS	STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSIONS INCH [MM]		Sussex, Wisconsin (262) 691-0400
	DECIMAL DIMENSIONS:		CHECKED BY	PROJECT ENG.	
	ONE PLACE	±.10"	±2.5mm		
	TWO PLACE	±.02"	±0.5 mm		
	THREE PLACE	±.004"	±0.10 mm		
ANGLE	±1/2°	±1/2°			
	CONFIDENTIAL		DRAWN BY	DATE	TITLE
	THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF GENCOAT INC. REPRODUCTION/COPYING OR DISCLOSURE OF THIS DRAWING TO OTHERS WITHOUT GENCOAT'S WRITTEN PERMISSION IS PROHIBITED. THIS DRAWING, AND ANY COPIES THEREOF, SHALL IMMEDIATELY BE RETURNED TO GENCOAT UPON REQUEST BY GENCOAT. IN FURNISHING THIS DRAWING, GENCOAT GRANTS NO RIGHTS OR LICENSES NOR MAKES ANY REPRESENTATIONS OR WARRANTIES REGARDING THIS DRAWING OR THE ACCOMPANYING INFORMATION. THE CONTENTS OF THESE DRAWINGS MAY BE PROTECTED BY UNITED STATES AND/OR FOREIGN COPYRIGHTS OR PATENTS.		TPP	1/22/2020	DRIVE UNIT, OILER TRAVEL, DEMAG PART DRAWING
			REFERENCE NO.		SCALE: DWG NO.
			ORIG. WORK ORDER NO.		N/A 815-060-12
					3RD ANGLE PROJECTION SHEET: 1 OF 1