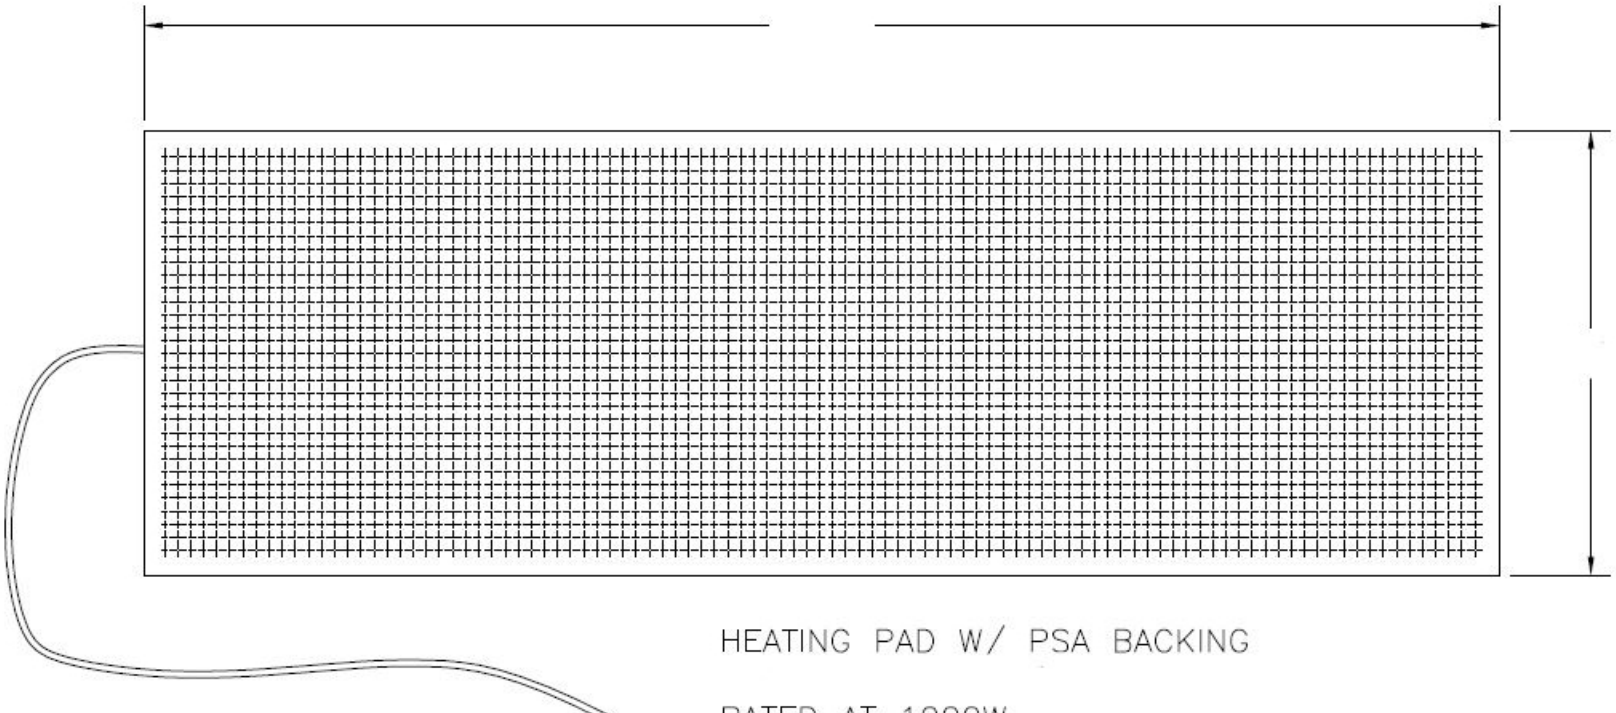

HEATING PAD W/ PSA BACKING

RATED AT 1000W

4	460V AC 50/60 HZ
3	110V AC 50/60 HZ
2	380V AC 50/60 HZ
1	220/240V AC 50/60 HZ
TAB #	VOLTAGE

MATERIAL	SILICON HEATER UNIT
FINISH	–

DESCRIPTION

This drawing and it's information, both explicit and conceptual, are the exclusive property of GFG Corporation and must not be copied, nor permitted to be copied, nor it's contents divulged to any third party, without the prior written permission of GFG Corporation.
In accepting this drawing, recipient agrees to observe the foregoing conditions and to use the drawing for only the purpose issued (information, quotation, maintenance, etc.) and to return the drawing to GFG Corporation when requested.

UNLESS OTHERWISE SPECIFIED
TOLERANCES
DECIMAL DIMENSIONS
.X = ±.030" ± 0.8 mm
.XX = ±.010" ± 0.25mm
.XXX = ±.005" ± 0.13mm
.XXXX = ±.0005" ± 0.013mm
DO NOT SCALE

DRAWN JGK | SCALE 1/2
APPROVED | DATE 3/3/03

GFG CORPORATION

PANEL

ENCL. HEATING

DWG. NO. 74D1011